


2015-125 Upconverter, 2.0 - 2.5 GHz

The 2015-125 Upconverter converts 70 ± 18 MHz to 2000 to 2500 MHz in 1kHz, 10kHz, 100kHz, or 125kHz steps (user selectable) with low group delay and flat frequency response. Synthesized local oscillators (LO) provide very low phase noise and ± 0.01 ppm stability frequency selection. Multi-function push button switches select the RF frequency, gain, and other parameters. Front panel LEDs provide indication of DC power (green), PLL alarm (red), remote operation (yellow) or the TX carrier is muted (yellow). Variable attenuators for the IF input and output provide a gain range of -10 to +30 dB as adjusted by the front panel multi-function push-button switches. Remote operation allows selection of frequency and gain. Parameter selection and frequency and gain settings appear on the LCD display. Connectors are BNC female for IF Input, RF output and the optional external reference input and output. The External 10 MHz option includes a 10 MHz input and output connector. The unit is powered by a 100-240 $\pm 10\%$ VAC power supply, and housed in a 1 3/4" X 19" X 16" rack mount chassis.

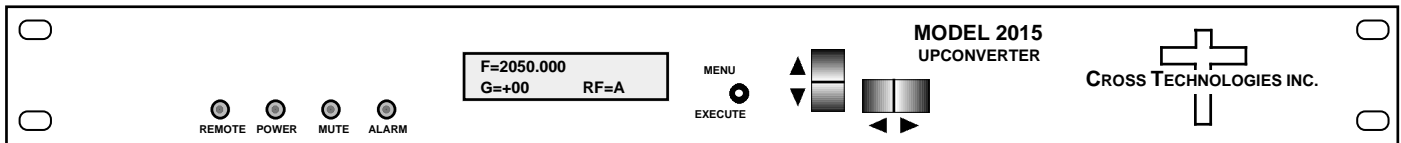

Front Panel

EQUIPMENT SPECIFICATIONS*

Input Characteristics (IF)

Impedance/Return Loss 50 Ω /18 dB
Frequency 70 \pm 18 MHz
Input Level -40 to -10 dBm

Output Characteristics (RF)

Impedance/Return Loss 50 Ω /12 dB
Frequency 2.0 to 2.5 GHz
Output level -20 to 0 dBm
Output 1 dB comp. +5 dBm

Channel Characteristics

Gain range (adjustable) -10.0 to +30.0 dB
Frequency Response ± 1.5 dB, 2.0-2.5 GHz ; ± 0.5 dB, 36 MHz BW
Spurious Response < -50 dBc, in band
Group Delay, max 0.01 ns/MHz² parabolic; 0.03 ns/MHz linear; 1 ns ripple
Frequency Sense Non-inverting

Synthesizer Characteristics

Frequency Accuracy $\pm .01$ ppm internal ref.
Frequency Step 1kHz, 10kHz, 100kHz, or 125kHz (user selectable)
10 MHz In/Out Level 3 dBm \pm 3 dB (option E)


Phase Noise @ F (Hz) >	100	1K	10K	100K	1M
dBC/Hz	-75	-90	-95	-105	-115

Controls, Indicators

Frequency Selection direct readout LCD; manual or remote selection
Gain Selection direct readout LCD; manual or remote selection
Pwr; Alarm; Rem; Mute Green LED; Red LED; Yellow LED; Yellow LED
Remote RS232C, 9600 baud (RS485, option Q)

Other

RF Connector BNC (female)
IF Connector BNC (female)
10 MHz Connector BNC (female), 50 Ω /75 Ω (option E)
Alarm/Remote Connector DB9 (female) - NO or NC contact closure on Alarm
Size 19 inch, 1RU standard chassis 1.75"high X 16.0" deep
Power 100-240 $\pm 10\%$ VAC, 47-63 Hz, 45 W max

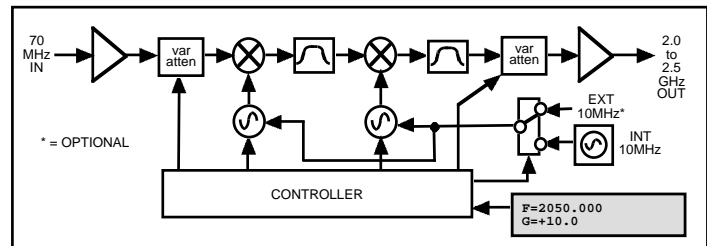

Block Diagram

Available Options

E - External 10 MHz ref input & output w/RF insertion
Q - RS485 Remote Interface
Z - Attenuator 0.1 dB on Upconverter
W8 - Ethernet with Web Browser
Connectors/Impedance
B - 75 Ω BNC (RF), 75 Ω BNC (IF)
C - 50 Ω BNC (RF), 75 Ω BNC (IF)
N - 50 Ω N-type (RF), 75 Ω BNC (IF)
M - 50 Ω N-type (RF), 50 Ω BNC (IF)

*10°C to 40°C; Specifications subject to change without notice