


## 2016-8287 Downconverter, 8.2 - 8.7 GHz to 70 ±18 MHz

The 2016-8287 Downconverter converts 8.2 to 8.7 GHz to 70 ± 18 MHz in 125 kHz steps (**1 kHz steps, option X1006**) with low group delay and flat frequency response. Synthesized local oscillators (LO) provide low phase noise and ±0.01 ppm stability frequency selection. Multi-function push button switches select the RF frequency, gain, and other parameters. Front panel LEDs provide indication of DC power (green), PLL alarm (red), and remote operation (yellow). Gain is adjustable manually over a +30 to +50 dB range as adjusted by the front panel multi-function push-button switches. Remote operation allows selection of frequency and gain. Parameter selection and frequency and gain settings appear on the LCD display. Connectors are BNC (female) for IF output and the 10MHz reference input and output, and Type N (female) for the RF input. External 10 MHz is standard. A 10 MHz output connector contains either the internal or external 10 MHz reference signal. It is powered by a 100-240 ±10% VAC power supply, and in a 1 3/4" X 19" X 16" rack mount chassis.

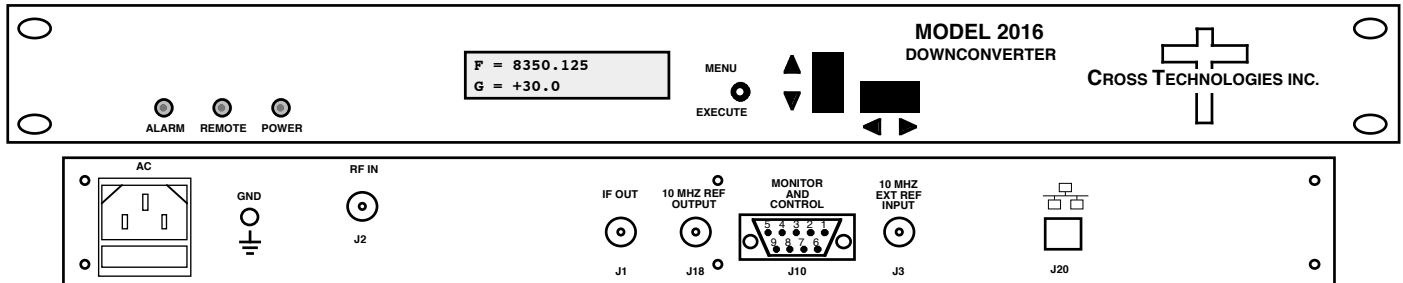

Front and Rear Panel (shown with Ethernet option)

### EQUIPMENT SPECIFICATIONS\*

#### Input Characteristics (RF)

Impedance/Return Loss **50Ω/20 dB typ; 18 dB min.**  
 Frequency 8.2 to 8.7 GHz  
 Noise Figure, max. **15 dB (max gain)**  
 Level **-70 to -40 dBm**

#### Output Characteristics (IF)

Impedance/Return Loss **75Ω/20 dB typ., 18 dB min.**  
 Frequency 70 ± 18 MHz  
 Level **-20 to 0 dBm**  
 1dB compression **+10 dBm**

#### Channel Characteristics

Gain range (adjustable) **+30 to +50 dB, 1 ±1 dB steps**  
 Image Rejection **> 50 dB, min**  
 Spurious Response **<-55 dBC, typical; <-50 dBC, maximum, inband**  
 Frequency Response **±1.5 dB, 8.2-8.7 GHz ; ± 0.6 dB, 36 MHz BW**  
 Group Delay, max **0.015 ns/MHz<sup>2</sup> parabolic; 0.05 ns/MHz linear, 1 ns ripple**  
 Frequency Sense Non-inverting

#### Synthesizer Characteristics

Frequency Accuracy **± 0.01 ppm internal reference; external reference input**  
 Frequency Step 125 kHz minimum; (**1 kHz steps, option X1006**)  
 10 MHz In/Out Level 3 dBm ± 3 dB


Phase Noise @ F (Hz) >	10	100	1K	10K	100K	1M
dBC/Hz	-50	-60	-70	-80	-95	-105

#### Controls, Indicators

Freq/Gain Selection direct readout LCD; pushbutton switches or remote selection  
 Power; Alarm; Remote Green LED; Red LED; Yellow LED  
 Remote RS232C, 9600 baud; **RS485/422 or Ethernet optional**

#### Other

RF / IF Connectors RF - Type N (female), **50Ω** / IF - BNC (female), **75Ω**  
 10 MHz Connectors BNC (female), **75Ω, works with 50 or 75 ohms**  
 Alarm/Remote Connector DB9 - NO or NC contact closure on Alarm  
 Size 19 inch, 1RU standard chassis 1.75" high X 16.0" deep  
 Power 100-240 ± 10% VAC, 47-63 Hz, 45 watts max

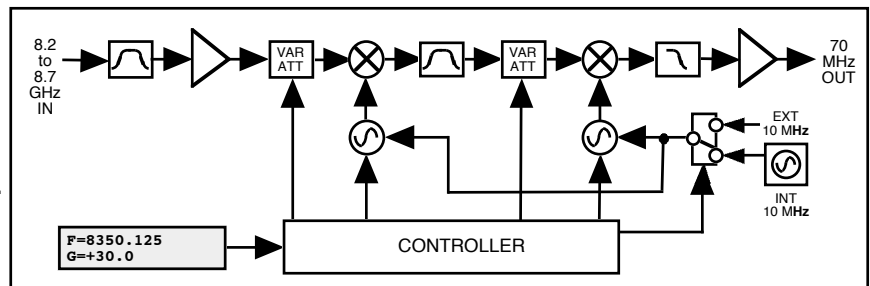

Block Diagram

#### Available Options

W7 - RF/IF Monitor Ports (Front)  
 W31 - Ext. Temp 0C to +50C  
 X1006 - 1 kHz frequency step  
 Z 5 - Attenuator 0.5 ± 0.5dB Steps

#### Remote M&C Interfaces:

Q - RS485/422  
 W8 - Ethernet; w/Web Browser (WB)  
 W18 - Ethernet; w/WB & SNMP  
 W28 - Ethernet; w/TCP/IP, Telnet  
 W828 - W8 + W18 + W28

#### Connectors/Impedance

STD. - 50Ω Type N (RF), 75Ω BNC (IF)  
 M - 50Ω Type N (RF), 50Ω BNC (IF)  
 S - 50Ω SMA (RF), 50Ω BNC (IF)  
 S7 - 50Ω SMA (RF), 75Ω BNC (IF)  
 SS - 50Ω SMA (RF), 50Ω SMA (IF)

\*10°C to 40°C; Specifications subject to change without notice