


2016-0717 Downconverter, 0.70 - 1.70 GHz to 70 MHz

The 2016-0717 Downconverter converts 700 to 1700 MHz to 70 ± 18 MHz in 1 MHz steps (**125 kHz to 1 kHz step options available**). Synthesized local oscillators (LO) provide frequency selection. Push button switches select the input frequency, gain, and other parameters. Front panel LEDs provide indication of DC power (green), PLL alarm (red), and Remote operation (yellow). Gain is adjustable manually (MGC) over a 0 to 50 dB range. Remote operation allows selection of frequency and gain. Parameter selection and frequency and gain settings appear on the LCD display. Connectors are BNC female for RF, IF, and the optional external reference input and output. **The external 10 MHz option E** includes a 10 MHz output connector which contains either the internal or external 10 MHz reference signal. A high stability **option H** (±0.01ppm) is also available. The 2016-0717 is powered by a 100-240 ± 10% VAC power supply, and housed in a 1 3/4" X 19" X 16" rack mount chassis.

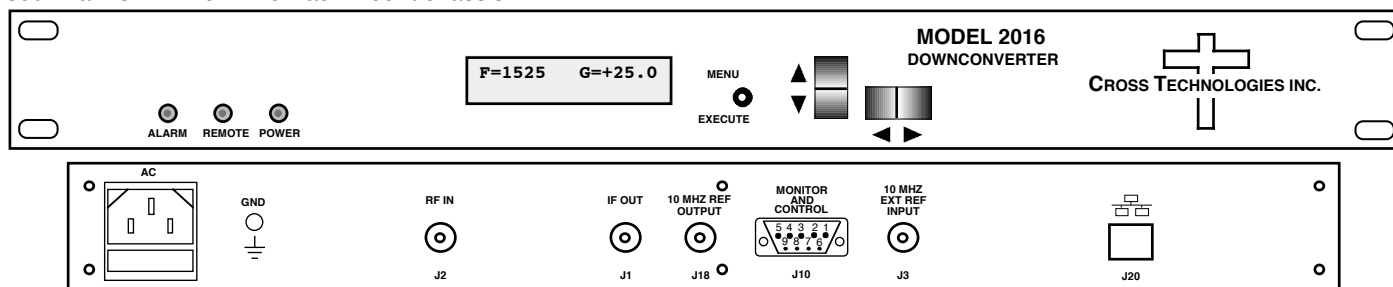

2016-0717 Front and Rear Panels (Optional Ethernet shown)

EQUIPMENT SPECIFICATIONS*

Input Characteristics (IF)


Impedance/Return Loss 50 Ω /12 dB
 Frequency 700 to 1700 MHz
 Input Level -70 to -20 dBm

Output Characteristics (RF)

Impedance/Return Loss 75 Ω/18 dB
 Frequency 70 ± 18 MHz
 Output level -20 to -10 dBm
 Output 1 dB comp. -5 dBm at max. gain, at Fc

Channel Characteristics

Gain range (adjustable) 0.0 to +50.0 dB, **1 ±1 dB steps (manually adjustable), at Fc**
 Image Rejection > 50 dB, min.
 Frequency Response ±1.5 dB, 700 - 1700 MHz; ± 0.5 dB, 36 MHz BW; **±1.0 dB, 40 MHz BW**
 Spurious Response < -50 dBc, in band
 Group Delay, max **0.015 ns/MHz² parabolic; 0.05 ns/MHz linear; 1 ns ripple**
 Frequency Sense Inverting or Non-inverting, selectable

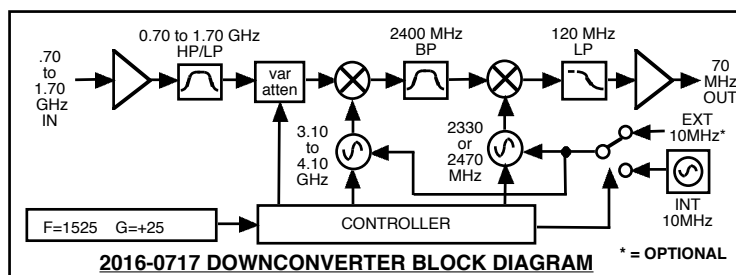

Synthesizer Characteristics

Frequency Accuracy ± 1.0 ppm max over temp (±0.01 ppm, option H)
 Frequency Step 1.0 MHz (**125 kHz to 1 kHz step options available**)

Phase Noise @ F (Hz) >	10	100	1K	10K	100K	1M
dBc/Hz	-55	-70	-70	-80	-90	-110

10 MHz Level (In or Out) 3 dBm, ± 3 dB, 75 ohms (option E)

Controls, Indicators

Freq/Gain Selection direct readout LCD; manual or remote selection
 Pwr; Alarm; Rem; Green LED; Red LED; Yellow LED;
 Remote RS232C, 9600 baud (**RS485, Ethernet Optional**)

Other

RF, IF Connectors **50Ω BNC (female) , 75Ω BNC (female)**
 10 MHz Connectors BNC (female), **75Ω, works with 50 or 75 ohms (option E)**
 Alarm/Remote Conn. DB9 (female) - NO or NC contact closure on Alarm
 Size 19 inch, 1RU standard chassis 1.75" H X 16.0" D
 Power 100-240 ±10% VAC, 47-63 Hz, **25 W max.**

Available Options

E - External 10 MHz ref in & out; RF Ins.
 H - High Stability (±0.01ppm) Internal Ref
 X or X1- 125 kHz or 100 kHz step size
X1002 -1kHz step, includes Option H
Z5 - Attenuator 0.5 ±0.5dB steps
Comm. Interface/Standard RS232

Q - RS485 Remote Interface
 W8 - Ethernet; w/Web Browser (WB)
 W18 - Ethernet; w/WB & SNMP
 W28 - Ethernet; w/TCP/IP, Telnet
 W828 - W8 +W18 +W28

Connectors/Impedance

STD - 50Ω BNC (RF), 75Ω BNC (IF)
 B - 75Ω BNC (RF), 75Ω BNC (IF)
 D - 50Ω BNC (RF), 50Ω BNC (IF)
 N - 50Ω N-type (RF), 75Ω BNC (IF)
 M - 50Ω N-type (RF), 50Ω BNC (IF)
 S - 50Ω SMA (RF), 50Ω BNC (IF)
 SS - 50Ω SMA (RF), 50Ω SMA (IF)

Contact Cross for other options

*10°C to 40°C; Specifications subject to change without notice.