


2015-24 Upconverter, 950 - 2150 MHz, 140 MHz IF

The 2015-24 L-band Upconverter converts 140 ± 36 MHz to 950 to 2150 MHz in 1kHz, 10kHz, 100kHz, or 125kHz steps (user selectable) with low group delay and flat frequency response. Synthesized local oscillators (LO) provide very low phase noise and ± 0.01 ppm stability frequency selection. Multi-function push button switches select the RF frequency, gain, and other parameters. Front panel LEDs provide indication of DC power (green), PLL alarm (red), remote operation (yellow) or the TX carrier is muted (yellow). Variable attenuators for the IF input and output provide a gain range of -10 to +30 dB as adjusted by the front panel multi-function push-button switches. Remote operation allows selection of frequency and gain. Parameter selection and frequency and gain settings appear on the LCD display. Connectors are BNC (female) for IF and the optional external reference input and output, and Type F (female) for the RF output. SSPB +24 VDC, 2.5 Amps and 10 MHz reference can be inserted on the RF line as added options. The 10 MHz option also includes a 10 MHz output connector, which contains either the internal or external 10 MHz reference signal. The unit is powered by a 100-240 $\pm 10\%$ VAC power supply, and housed in a 1 3/4" X 19" X 16" rack mount chassis.

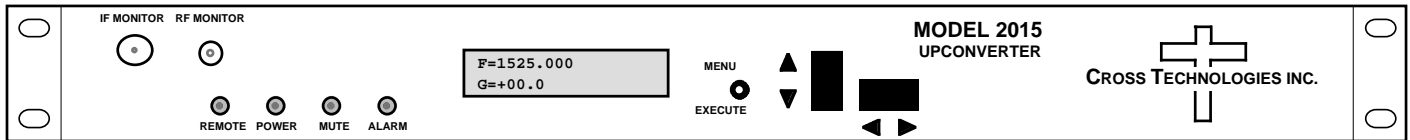

Front Panel

EQUIPMENT SPECIFICATIONS*

Input Characteristics (IF)

Impedance/Return Loss 75Ω/18 dB
Frequency 140 ± 36 MHz
Input Level -40 to -10 dBm

Output Characteristics (RF)

Impedance/Return Loss 75Ω/12 dB
Frequency 950 to 2150 MHz
Output level -20 to 0 dBm
Output 1 dB comp. +5 dBm

Channel Characteristics

Gain range (adjustable) -10.0 to +30.0 dB
Frequency Response ± 1.5 dB, 950 - 2150 MHz ; ± 0.5 dB, 72 MHz BW
Spurious Response < -50 dBc, in band
Group Delay, max 0.0035 ns/MHz² parabolic; **0.035** ns/MHz linear; 1 ns ripple
Frequency Sense Non-inverting

Synthesizer Characteristics

Frequency Accuracy ± 0.01 ppm internal reference
Frequency Step 1kHz, 10kHz, 100kHz, or 125kHz (user selectable)
10 MHz In/Out Level 3 dBm \pm 3 dB (option E)


Phase Noise @ Freq	100Hz	1kHz	10kHz	100kHz	1MHz
dBC/Hz	-72	-85	-88	-110	-120

Controls, Indicators

Freq/Gain Selection Direct readout LCD; push-button switches or remote ctrl
Pwr; Alarm; Rem; Mute Green LED; Red LED; Yellow LED; Yellow LED
Remote RS232C, 9600 baud (RS485, option-Q)
(Ethernet Interface, option-W8/W28)

Other

RF Connector Type F (female)
IF Connector BNC (female)
10 MHz Connectors BNC (female), 50Ω/75Ω (option E)
Alarm/Remote Connector DB9 - NO or NC contact closure on Alarm
Size 19 inch, 1RU standard chassis 1.75"high X 16.0" deep
Power 100-240 $\pm 10\%$ VAC, 47-63 Hz, 45 watts max

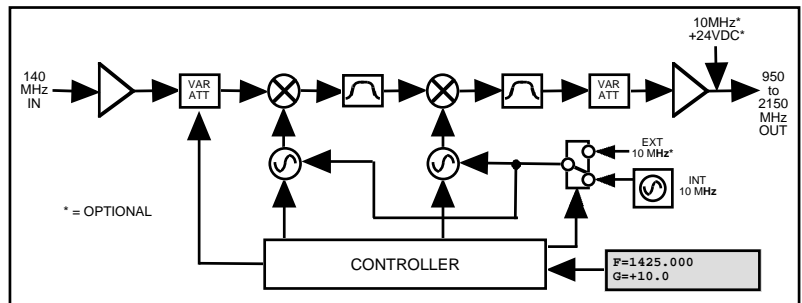

Block Diagram

Available Options

E - External 10 MHz ref in & out w/ RF insertion
V - SSPB Voltage, +24VDC, 2.5 amps
Q - RS485 Remote Interface
Z - Attenuator 0.1 dB on Upconverter
X or X1 - 125 or 100 KHz steps
W7 - RF (SMA) and IF (BNC) 50Ω Monitor Ports
W8 - Ethernet M&C Remote Interface
W18 - Ethernet M&C Remote Interface with SNMP
W28 - Provides Web Browser; also allows direct TCP/IP and/or Telnet® addressability
W31 - Extended Temperature 0C to +50C

Connectors/Impedance

B - 75Ω BNC (RF), 75Ω BNC (IF)
C - 50Ω BNC (RF), 75Ω BNC (IF)
D - 50Ω BNC (RF), 50Ω BNC (IF)
N - 50Ω N-type (RF), 75Ω BNC (IF)
M - 50Ω N-type (RF), 50Ω BNC (IF)

*10°C to 40°C; Specifications subject to change without notice.