


4115-300 Ka-band Block Upconverter, Weather Resistant

The 4115-300 Ka-band Block Upconverter converts 0.95 - 1.95 GHz up to 27.5 - 31.0 GHz in four selectable fixed bands. Front panel LEDs provide indication of DC Power and PLL Alarms. The L-band to RF gain is +30 dB. Connectors are 2.92mm for RF Out and RF Monitor, SMA for the external reference input and reference output and Type N (all female) for the L-band. Gain, band select, and internal 10 MHz frequency are controlled by the Ethernet M&C. **In AUTO, the 10 MHz reference stays in external if the external level is in the +2 to +8 dBm range.** It is powered by a 100-240 ± 10% VAC power supply, and mounted in a 8"W X 6"H X 16"D Weather Resistant enclosure.

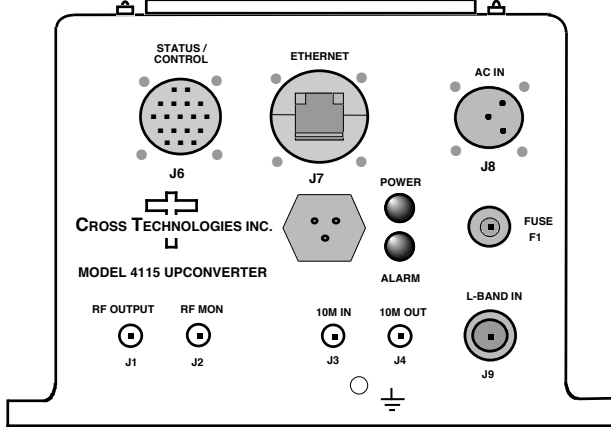

***Weather Resistant** enclosures are designed to be water resistant for installation in an outdoor enclosure/antenna hut OR mounted outdoors on an antenna assembly at their specified temperature ranges. They are designed to be located "out in the elements" (water, sleet, snow, etc.) but they are *not* designed to be "submerged under" water.

If an extended temperature range is required, there is an **Extended Temperature** option (**Option W21**; -30°C to +60°C) available at an additional cost. Contact Cross for quote.

EQUIPMENT SPECIFICATIONS**

Input Characteristics

- Impedance/Ret. Loss 50Ω/14 dB
- Frequency 0.95 to 1.95 GHz
- Noise Figure, Max. 20 dB max gain
- Input Level range -40 to -15 dBm

Output Characteristics

- Impedance/Ret. Loss 50 Ω /14 dB, **Mute & UnMute**
- Frequency (GHz) BAND1 27.5 to 28.5
BAND2 28.0 to 29.0
BAND3 29.0 to 30.0
BAND4 30.0 to 31.0
- Output Level Range -15 to 0 dBm
- Output 1 dB comp. **+8 dBm, max gain**
- Mute >60 dB @ 0 dBm output**

Channel Characteristics

- Gain at F_c +30 ±3 dB, (+30 to 0 dB variable in 0.5 dB steps)
- Spurious, Inband SIG REL <-50 dBC in band, -15 to 0 dBm out; SIG IND, <-55 dBm; **Over 27.5 to 31 GHz band**
- Spurious, Out of band **<-50 dBC; Over 27.0-27.5 and 31.0-31.5 GHz band**
- Intermodulation **<-45 dBC** for two carriers at 4 MHz spacing, each at -5 dBm out
- Frequency Response ±2 dB, over RF band; ± 0.5 dB, 40 MHz BW, Frequency Sense - Non-inverting

LO Characteristics


- LO Frequency Band Specific
- Frequency Accuracy ± 0.05 ppm max over temp internal reference; ext. ref. input
- 10 MHz level In/Mon +2 to +8 dBm in; Monitor Output = input level ± 1.0 dB, 50 ohms

Phase Noise @ F (Hz) >	100	1K	10K	100K	1M
dBC/Hz	-65	-75	-80	-95	-105

Controls, Indicators

- Gain, Band, 10M Freq. Gain, band select, and internal 10 MHz frequency via Ethernet M&C or Status/Control Connector
- PLL Alarm Red LED, External Contact Closure
- Power Green LED

Other

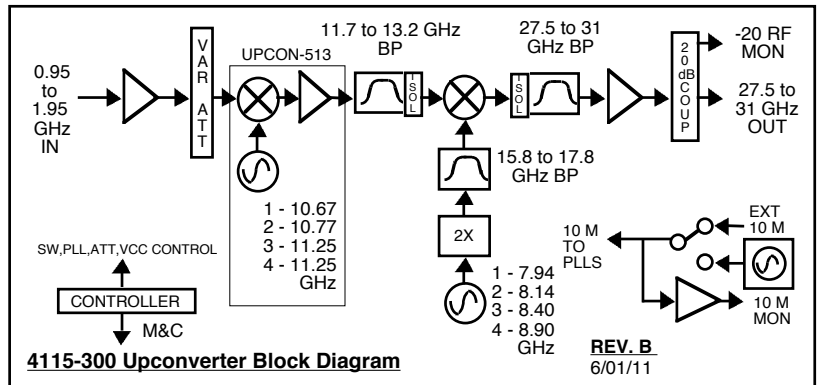

Connectors*	Connector Part #	Mating Connector Part #
Status/Control Connector	MS3112E14-18S	MS3116F14-18P
Ethernet Connector/RJ45	RJF21B	RJF6G
AC Input Connector**	CL1M1102	CL1F1101

Additional Connector Specifications*		
RF Out, RF Mon. Connectors 2.92 mm, 40 GHz (female) 50Ω	L-Band Connector Type N (female) 50Ω	10MHz Connectors SMA (female) 50Ω

Size 8" Wide X 6" High X 16" Deep Weather Resistant* Enclosure *All Connectors are Weather Resistant
 Power 100-240 ±10% VAC, 47 - 63 Hz, 25 watts max.,
 FCI Clipper Series CL1M1102 Weather Resistant Connector

*+0 to +50 degrees C; Specifications subject to change without notice