


## 2099-2424 10MHz, 24V Source/Inserter

The 2099-2424 10 MHz Source/Inserter is a 10 MHz,  $\pm 0.01$  ppm oven controlled crystal oscillator (OCXO) with circuitry to insert the 10MHz signal and DC voltage on L-band lines for an LNB and SSPB. Multi-function switches select LNB and SSPB DC Power, internal or External 10 MHz, and insertion of 10 MHz on the L-band lines. LEDs indicate DC power (green), Reference insertion (green), alarm (red), remote operation (yellow), and OCXO oven warm-up (yellow). **An external 10 MHz reference can be selected to be inserted directly into the L-Band lines. Option E6 also allows the internal 10 MHz source to be locked to a high stability external 10 MHz reference.** Remote control allows remote configuration of front panel commands and monitoring LNB and SSPB voltage and current. Parameter selection and LNB and SSPB voltage and current appear on the LCD display. Connectors are BNC female for RF and 10 MHz input and output signals. AC power is 100-240  $\pm 10\%$  VAC, 47-63 Hz. The chassis is 1 RU, 12" deep.

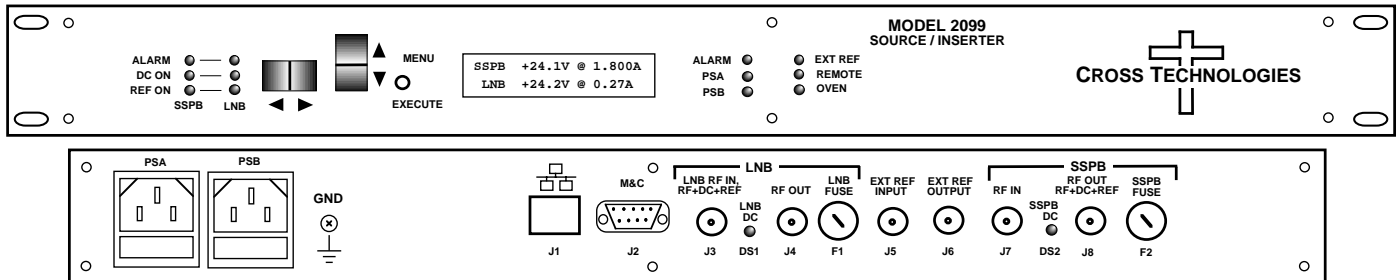

Front and Rear Panels (Shown with optional Ethernet)

### EQUIPMENT SPECIFICATIONS\*

#### ----- 10 MHz Reference -----

##### Output Characteristics (on L-band RF)

Level	+2 dBm $\pm 2$ dB
Harmonics	<-30 dBC, <-40 dBC typ
Level to non-insert end	<-20 dBm, <-30 dBm typ

##### Input/Output Characteristics (on BNC connectors)

Impedance, Return Loss	50 $\Omega$ /75 $\Omega$ , 14 dB
Level	+3 dBm $\pm 3$ dB
Harmonics (Output)	< -30 dBC, < -40 dBC typical

##### Oscillator

Stability	$\pm 0.01$ ppm max over temp
Aging, per day	$\pm 0.001$ ppm
Aging, per year	$\pm 0.1$ ppm
Warm up, 4 minutes	$\pm 0.1$ ppm
Warm up, 1 hour	$\pm 0.01$ ppm
Tuning Adjust	$\pm 0.5$ ppm

Phase Noise @ Freq	10 Hz	100 Hz	1kHz	10kHz
> dBC/Hz	110	140	149	149

#### ----- Chassis / Other -----

##### Controls, Indicators

INT/EXT 10 MHz Select	FP Switch or M&C select; <b>Ext. Yellow LED</b>
10 MHz Insert Select	FP Switch or M&C select; <b>Green LED</b>
SSPB, LNB Insert	FP Switch or M&C select; <b>Green, rear Yellow LED</b>
SSPB, LNB Volts & Amps	Front panel display and M&C
Power, Alarm, Ref.	Green LED; Red LED; Green LED
Oven, Ext Ref, Remote	Yellow LED; Yellow LED; Yellow LED

##### Other

RF Connectors	BNC, 50 $\Omega$ (female)
10 MHz Connectors	<b>BNC, 50 (female) (WORKS FOR 50<math>\Omega</math> OR 75<math>\Omega</math>)</b>
Alarm/Remote Connector	DB9 (female) - NO or NC closure on Alarm
Size	19 inch, 1RU chassis 1.75"H X 12.0"D
Power	100-240 $\pm 10\%$ VAC, 47-63 Hz, <b>100</b> watts max


#### ----- L-band Insertion -----

##### RF Input/Output Characteristics

Frequency	950 - 2150 MHz and 10 MHz
Impedance	50 $\Omega$
Return Loss	>12 dB, 0.95-1.5 GHz >10 dB, 1.5-2.15 GHz
Insertion Loss	< 1 dB, 0.95-1.5 GHz < 2 dB, 1.5-2.15 GHz
Frequency Response	$\pm 1.0$ dB, 950 - 2150 MHz; $\pm 0.5$ dB, 36 MHz BW

##### SSPB, LNB DC Power Characteristics

Voltage/Current	SSPB +24 $\pm 2$ VDC, 2.5 A, max.
	LNB +24 $\pm 2$ VDC, 0.5 A, max.
Load Regulation	$\pm 5\%$

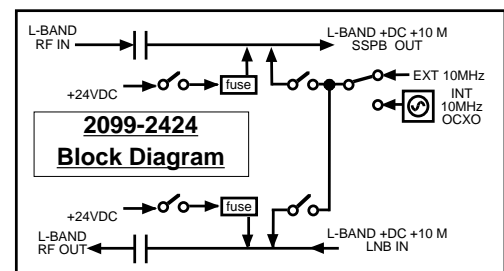

\*10°C to 40°C; Specifications subject to change without notice.

E6 - Lock Int. 10 MHz Ref to External 10 MHz	<b>OPT I O N S</b>
R - Redundant AC Power	
Comm. Interface/Standard RS232	
Q - RS485 Remote Interface	
W8 - Ethernet; w/Web Browser (WB)	
W18 - Ethernet; w/WB & SNMP	
W28 - Ethernet; w/TCP/IP, Telnet®	
Connectors/Impedance	
B - 75 $\Omega$ BNC	
F - 75 $\Omega$ F-type	
NN - 50 $\Omega$ N-type	