


2415-40925 Upconverter, 0.95 - 2.50 GHz, Four Channel

2415-30925 Three Channel • 2415-20925 Two Channel • 2415-10925 One Channel

The 2415-40925 Upconverter has four individual channels, each one converts 70 MHz to 950 to 2500 MHz in 125 kHz steps using PLL in "exact frequency mode" with low group delay and flat frequency response. Synthesized local oscillators (LO) provide frequency selection. Push button switches select the output frequency, gain, and other parameters. Front panel LEDs provide indication of DC power, PLL alarm or Remote operation. Gain is adjustable manually over a 0 to +30 dB range in 0.5 ± 0.5 dB steps. The frequency and gain of each channel are also remotely selectable. Parameter selection and frequency and gain settings appear on the LCD display. Connectors are Type F female for the RF, and BNC female for the IF and external 10 MHz reference input and output. The 10 MHz reference can be inserted on all RF lines. The table below shows available options. SSPB +24 VDC option V1, can be inserted only on the channel 1 RF line. The unit is powered by a 100-240 ±10% VAC, 47-63 Hz power supply, and is in a 1 3/4" X 19" X 16" rack mount chassis.

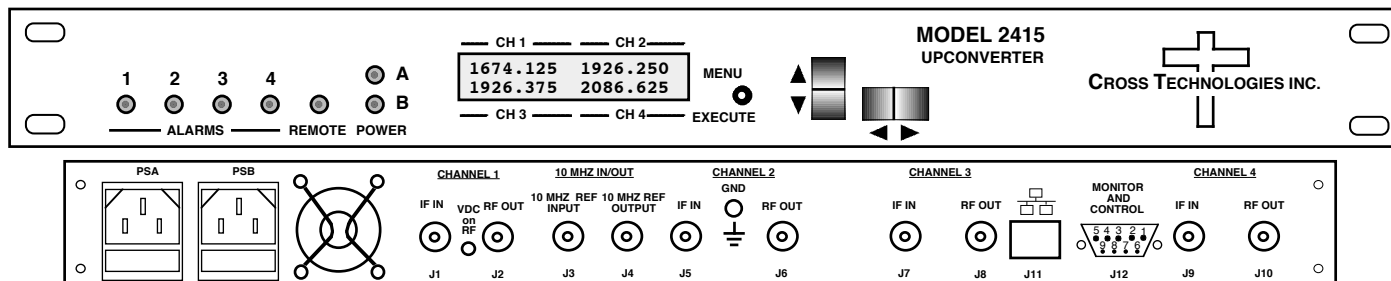

Front and Rear Panels 2415-40925 Four Channel (Shown with V1, R, W113 and Ethernet Options)

EQUIPMENT SPECIFICATIONS*

Input Characteristics

Impedance/Return Loss 75Ω/18 dB
 Frequency 70 ± 18 MHz
Noise Figure, max. 20dB (set to min input, max gain)
 Input Level range -35 to -10 dBm

Output Characteristics

Impedance/Return Loss 50Ω /12 dB
 Frequency 950 to 2500 MHz
 Output Level range -20 to 0 dBm
 Output 1 dB compression +10 dBm, max. gain

Channel Characteristics

Gain range (adjustable) 0 to +30 dB in 0.5 ± 0.5 dB steps
 Frequency Response ±2.0 dB, 950 - 2500 MHz; ±0.5 dB, 36 MHz BW; ±1.0 dB, 40 MHz BW
 Spurious < -50 dBc, in band; < -45 dBc, out of band (0.2-0.94 GHz and 2.51-3.0 GHz)
Intermodulation
 Ch to Ch isolation < -50 dBc for two carriers at Fc ±2 MHz spacing, each at -5 dBm out (set to -30 dB input, 30dB gain)
 Group Delay, max < -60 dB typ., < -50 dB min.; G=30, -30 dBm input level
 Frequency Sense Non-inverting

Synthesizer Characteristics

Frequency Accuracy ± 1.0 ppm max over temp (± 0.01 ppm, option H)
 Frequency Step 125 kHz (as low as 1 kHz steps available)

Phase Noise @ Freq (Hz)	10	100	1k	10k	100k	1M
Specification dBc/Hz	-60	-65	-75	-80	-90	-110


10 MHz Level (In or Out) 3 dBm, ± 3 dB, 75 ohms

Controls, Indicators

Freq/Gain Selection direct readout LCD; manual or remote selection
 Power; Alarm; Remote Green LED; Red LED; Yellow LED
 Remote RS232C/RS485 selectable, (Ethernet optional)

Other

RF, IF Connectors 50 Ω BNC (female), 75 Ω BNC (female)
 110 MHz Connectors 50Ω BNC (female) works with 50 & 75 Ω
 Alarm/Remote Connector DB9 (female) - NO or NC contact closure on Alarm
 Size 19 inch, 1RU standard chassis 1.75" high X 16.0" deep
 Power 100-240 ± 10% VAC, 47-63 Hz, 45 watts max

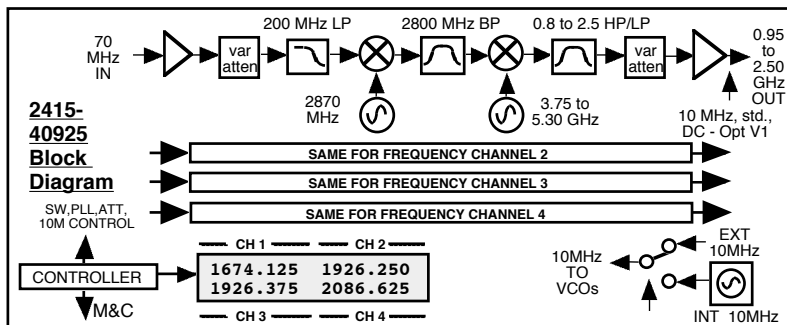

Available Options

H - High Stability (±0.01ppm) Int Ref
 V1-SSPB DC, CH1(ONLY), +24VDC, 2.5 A
 R - Redundant Power Supply
 W8 - Ethernet; w/Web Browser (WB)
 W18 - Ethernet; w/WB & SNMP
 W28 - Ethernet; w/TCP/IP, Telnet
W828 - W8 + W18 + W28
W113- Rear Mounted Fan
 W140-x- 140±36 MHz
 W140/70-x- 140±36/70±18 MHz Selectable
W370-20-x- 370±20 MHz
X1002-x - 1 kHz Frequency Step Size
Connectors/Impedance
 STD - 50Ω BNC (RF), 75Ω BNC (IF)
 Bx - 75Ω BNC (RF), 75Ω BNC (IF)
 Dx - 50Ω BNC (RF), 50Ω BNC (IF)
 Kx - 75Ω BNC (RF), 50Ω BNC (IF)
x = # of Channels
Contact Cross for other options

10°C to 40°C; Specifications subject to change without notice