


2015-1266 Fixed Frequency Upconverter, 2.65675 GHz

The 2015-1266 S-band Upconverter converts 140 (± 36) MHz to 2.65675 GHz (± 36 MHz) Fixed with low group delay and flat frequency response. Synthesized local oscillators (LO) provide very low phase noise and ± 0.01 ppm stability frequency selection. Multi-function push button switches select the gain, and other variable parameters. Front panel LEDs provide indication of DC power (green), PLL alarm (red), remote operation (yellow) or the TX carrier is muted (yellow). Variable attenuators for the IF input and output provide a gain range of -10 to +30 dB as adjusted by the front panel multi-function push-button switches. Remote operation allows selection of gain and other variable parameters. Parameter selection and frequency and gain settings appear on the LCD display. Connectors are BNC (female) for IF input and optional external reference input / output, and Type N (female) for the RF output. The External 10 MHz reference Option includes a 10 MHz output connector, which provides the selected (internal or external) 10 MHz reference signal output. The unit is powered by a 90-260 VAC power supply, and housed in a 1 3/4" X 19" X 16" rack mount chassis.

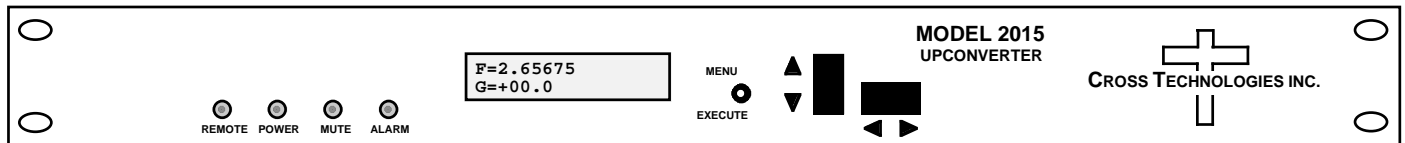

Front Panel

EQUIPMENT SPECIFICATIONS*

Input Characteristics (IF)

Impedance/Return Loss 75 Ω /18 dB
 Frequency 140 \pm 36 MHz
 Input Level -40 to -10 dBm

Output Characteristics (RF)

Impedance/Return Loss 50 Ω /12 dB
 Frequency 2.65675 GHz (± 36 MHz) Fixed
 Output level -20 to 0 dBm
 Output 1 dB comp. +5 dBm


Channel Characteristics

Gain range (adjustable) -10.0 to +30.0 dB
 Frequency Response 2.65675 GHz ; ± 0.5 dB, 72 MHz BW
 Spurious Response < -60 dBc, in band typical; -55 dBc max.
 Group Delay, max 0.0035 ns/MHz² parabolic; 0.025 ns/MHz linear; 1 ns ripple
 Frequency Sense Non-inverting

Synthesizer Characteristics

Frequency Accuracy $\pm .01$ ppm internal reference
 Frequency Step None; Fixed Frequency, non-tunable
 10 MHz In/Out Level 3 dBm \pm 3 dB (option E)
 Phase Noise

| @ Freq | 10Hz | 100Hz | 1kHz | 10kHz | 100kHz | 1MHz |
|--------|------|-------|------|-------|--------|-------|
| dBc/Hz | <-65 | <-77 | <-82 | <-90 | <-102 | <-110 |

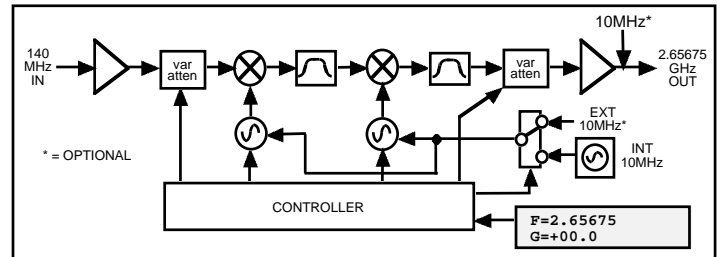

Block Diagram

Controls, Indicators

Freq/Gain Selection direct readout LCD; pushbutton switches or remote selection
 Pwr; Alarm; Rem; Mute Green LED; Red LED; Yellow LED; Yellow LED
 Remote RS232C, 9600 baud (RS485, option Q)

Other

RF Connector N-type (female)
 IF Connector BNC (female)
 10MHz Connectors BNC (female) 50 Ω /75 Ω (option E)
 Alarm/Remote Connector DB9 - NO or NC contact closure on Alarm
 Size 19 inch, 1RU standard chassis 1.75"high X 16.0" deep
 Power 90-260 VAC, 47-63 Hz, 45 watts max

Available Options

E - External 10 MHz ref input & output
 Q - RS485 Remote Interface
 O - LO Adjust

Connectors/Impedance

B - 75 Ω BNC (RF), 75 Ω BNC (IF)
 C - 50 Ω BNC (RF), 75 Ω BNC (IF)
 D - 50 Ω BNC (RF), 50 Ω BNC (IF)
 M - 50 Ω N-type (RF), 50 Ω BNC (IF)

*10°C to 40°C; Specifications subject to change without notice